

445 AL

4" Adjustable Louver



Application:
High flow -thru design with concealed blade linkage, stainless steel bearing sleeves, and a hexagon shaped axle assuring positive blade alignment. Ideally suited for air intake and exhaust. Applications that require tight shutoff



Material:
6063-T5 .081" aluminum frame
6063-T5 .081" aluminum blades

Sizes:
Minimum size: 12" x 12"
Maximum section: 60" x 96"
OptL. blade seals: 48" x 96"
Sections can be field assembled to Construct larger sizes.

Features:
40% Free Area @ 48" X 48" back blade full open
Solid frame construction
All aluminum construction
Outstanding durability
Low maintenance
Easily removable screens

Options:
Pneumatic or electric actuators
High Wind load bracing
Bird Screen
Insect screen

Finishes:
Mill Finish
Clear Anodize
Prime Coat
Baked Enamel Finish
Kynar
Color Anodizing

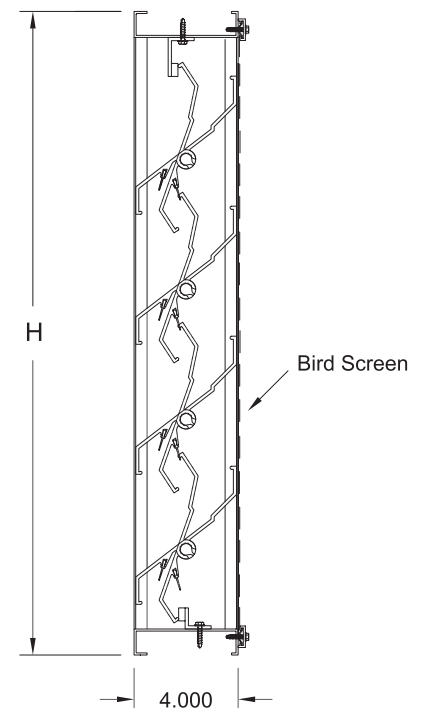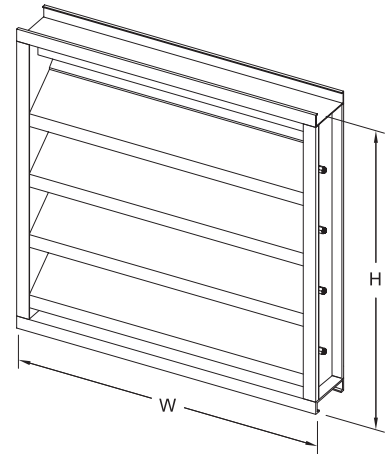

REPRESENTATIVE:	CONTRACTOR:
ARCHITECTURAL	LOCATION
ENGINEER	PROJECT
	DATE