

445 DDL

4" Double Drainable Louver



Application:
High flow-thru design with double drainable blades and downspouts in frame minimizes water cascading between blades and provides maximum water protection. Hidden mullion allows for continuous blade appearance.

Material:
6063-T5 .082" thick aluminum frame with
6063-T5 .082" thick aluminum extruded blades.



Sizes:
Minimum size: 12" x 12"
Maximum section: 120" x 90"
Sections can be field assembled to
Construct larger sizes.

Construction:
Blade angle approximately 45 degree angle spaced approximately 4.5" center to center.

Features:
52% Free Area @ 48" X 48"
Solid frame construction
All aluminum construction
Outstanding durability
Low maintenance
Easily removable screens

Options:
Installation angles
Hinged Frame
Front or rear security bars
Filter Racks
High Wind load bracing
Bird Screen
Insect screen

Finishes:
Mill Finish
Clear Anodize
Prime Coat
Baked Enamel Finish
Kynar
Color Anodizing

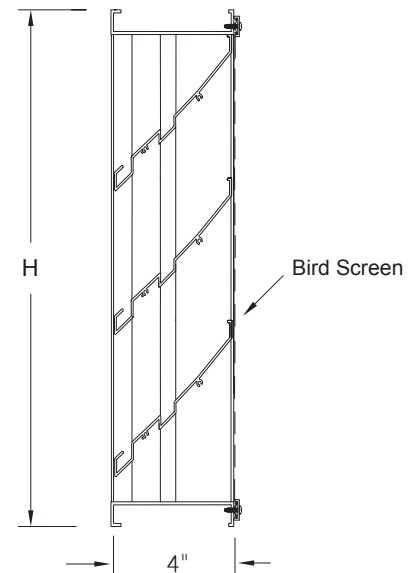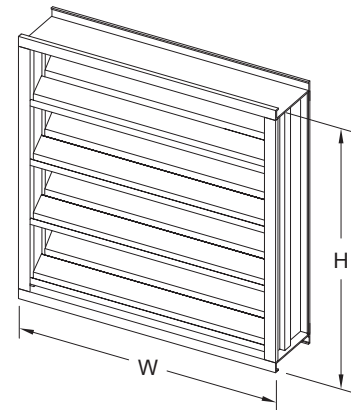

REPRESENTATIVE:	CONTRACTOR:
ARCHITECTURAL	LOCATION
ENGINEER	PROJECT
	DATE