

# 645 SL

## 6" Stationary Louver



### Application:

High flow - thru design with low pressure drop and high free area.  
Aluminum construction for high resistance to corrosion  
Hidden mullion allows for continuous blade appearance.

### Material:

6063-T5 .081" aluminum frame  
6063-T5 .081" aluminum blades

### Sizes:

Minimum size: 12" x 12"  
Maximum section: 144" x 96"  
Sections can be field assembled to  
Construct larger sizes.

### Construction:

.081" Thick aluminum blades positioned at 45 angle and spaced approximately 6.000" center to center

### Features:

56% Free Area @ 48" X 48" back blade full open  
Solid frame construction  
All aluminum construction  
Outstanding durability  
Low maintenance  
Easily removable screens



### Options:

**Pneumatic or electric actuators**

High Wind load bracing  
Bird Screen  
Insect screen

### Finishes:

Mill Finish  
Clear Anodize  
Prime Coat  
Baked Enamel Finish  
Kynar  
Color Anodizing

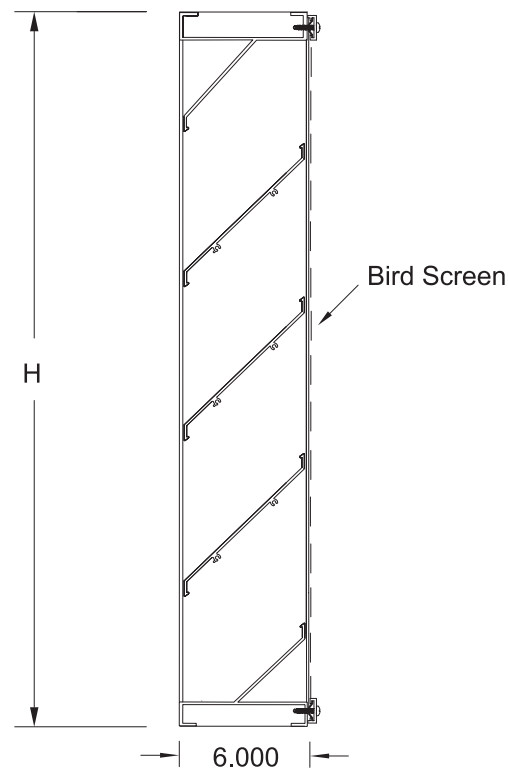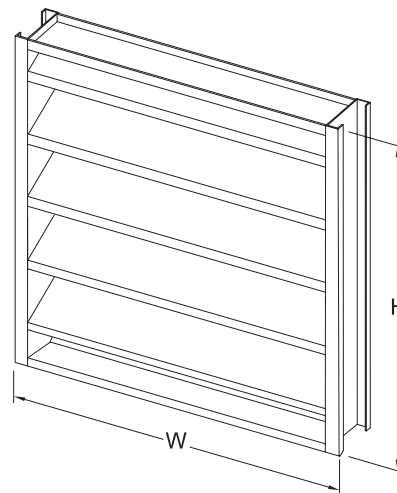

<b>REPRESENTATIVE:</b>	<b>CONTRACTOR:</b>
<b>ARCHITECTURAL</b>	<b>LOCATION</b>
<b>ENGINEER</b>	<b>PROJECT</b>
	<b>DATE</b>