BV BD
Brick Vent with Back Draft Damper

Application:

High flow-thru design with operable back draft blades opening at .01" static pressure and become fully open at .23" static pressure.

Material:

6063-T5 .050" thick aluminum back draft blades,
6063-T5 .125" thick aluminum Head & Sill with
6063-T5 .125" thick aluminum extruded blades.

Sizes:

See price list for standard sizes. Custom sizes should be ordered by opening size.

Construction:

Blade angle approximately 45 degree angle
Blades spaced for maximum performance

Finishes:

Standard Mill Finish
Clear Anodize
Prime Coat
Baked Enamel Finish
Bronzed Anodized Finish

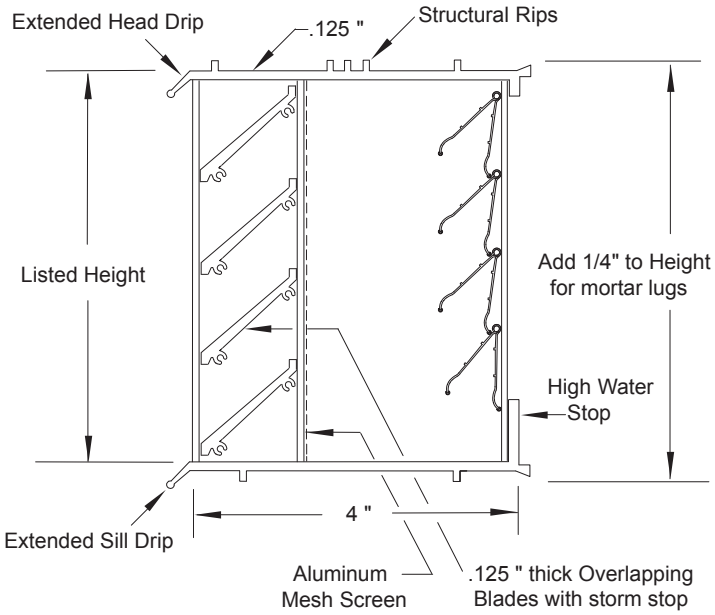

REPRESENTATIVE:	**CONTRACTOR:**
ARCHITECTURAL	**LOCATION**
ENGINEER	**PROJECT**
	DATE

13550 Pumice St. Norwalk, California 800) 960-0242, 562) 921-9839 Fax